

ECO EURO PROPS

BS EN 1065



Formwork Direct Eco Euro Props, are adjustable props that feature an adjustable range from 1.7m to 5m. These props are hot-dipped galvanized for superior durability and come equipped with universal holes, making them compatible with any falsework system. Both the inner and outer props are meticulously designed to meet any construction needs.


The props feature numbered pegging holes for easier height adjustment and quick connection. Head adapters of various types can be secured into the prop using the spring pin.

Euro Props have drop out latches to prevent the inner tube sliding out of the fixed tube. When it fully closes, the prop still has a 10 cm gap so that the operator's hands are not trapped.

ECO EURO PROPS


BS EN 1065

ECO 300 EURO PROP

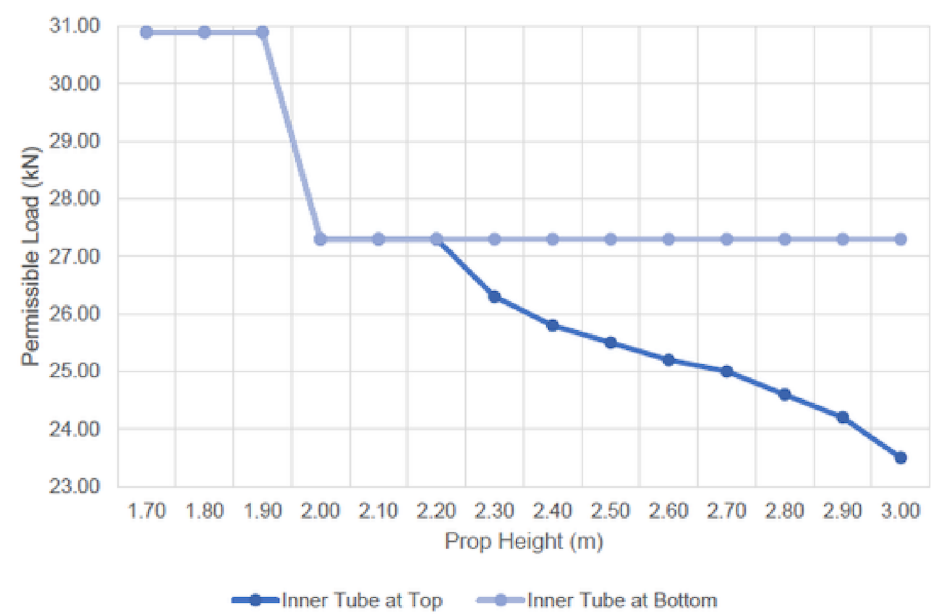

Prop Height (m)	Inner Tube At Top (kN)	Inner Tube At Bottom (kN)
1.70	30.90	30.90
1.80	30.90	30.90
1.90	30.90	30.90
2.00	27.30	27.30
2.10	27.30	27.30
2.20	27.30	27.30
2.30	26.30	27.30
2.40	25.80	27.30
2.50	25.50	27.30
2.60	25.20	27.30
2.70	25.00	27.30
2.80	24.60	27.30
2.90	24.20	27.30
3.00	23.50	27.30

ECO 350 EURO PROP

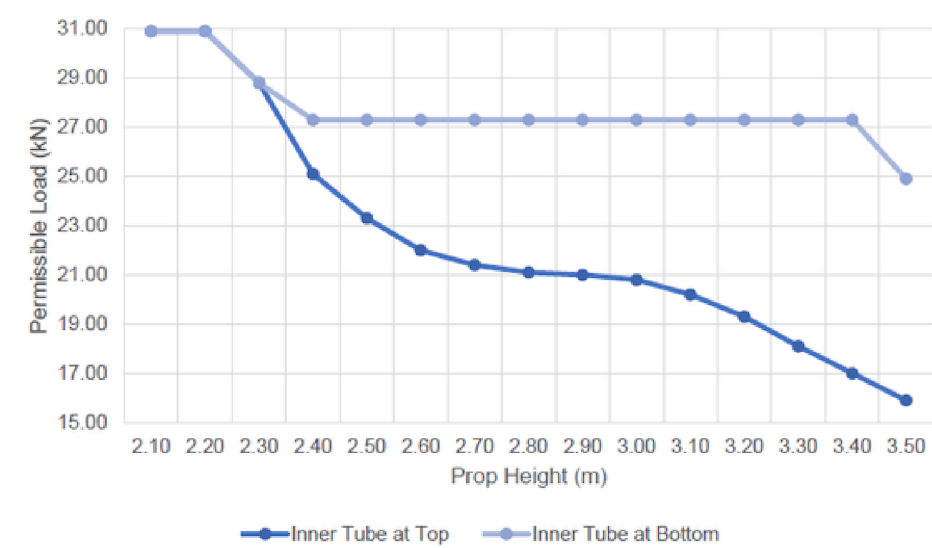


Prop Height (m)	Inner Tube At Top (kN)	Inner Tube At Bottom (kN)
2.10	30.90	30.90
2.20	30.90	30.90
2.30	28.80	28.80
2.40	25.10	27.30
2.50	23.30	27.30
2.60	22.00	24.30
2.70	21.40	27.30
2.80	21.10	27.30
2.90	21.00	27.30
3.00	20.80	27.30
3.10	20.20	27.30
3.20	19.30	27.30
3.30	18.10	27.30
3.40	17.00	27.30
3.50	15.90	24.90

ECO EURO PROPS


BS EN 1065

ECO 400 EURO PROP

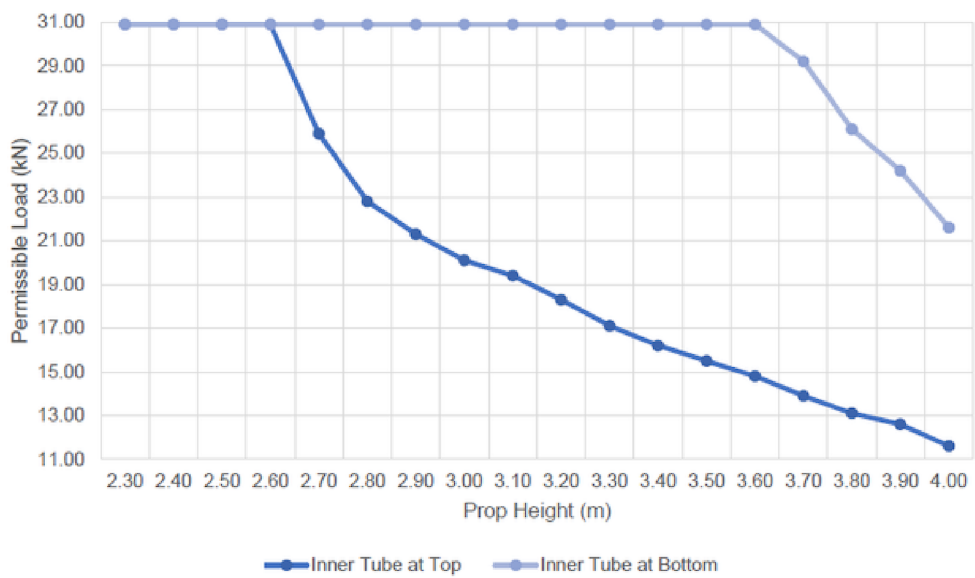

Prop Height (m)	Inner Tube At Top (kN)	Inner Tube At Bottom (kN)
2.30	30.90	30.90
2.40	30.90	30.90
2.50	30.90	30.90
2.60	30.90	30.90
2.70	25.90	30.90
2.80	22.80	30.90
2.90	21.30	30.90
3.00	20.10	30.90
3.10	19.40	30.90
3.20	18.30	30.90
3.30	17.10	30.90
3.40	16.20	30.90
3.50	15.50	30.90
3.60	14.80	30.90
3.70	13.90	29.20
3.80	13.10	26.10
3.90	12.60	24.20
4.00	11.60	21.60

ECO 500 EURO PROP

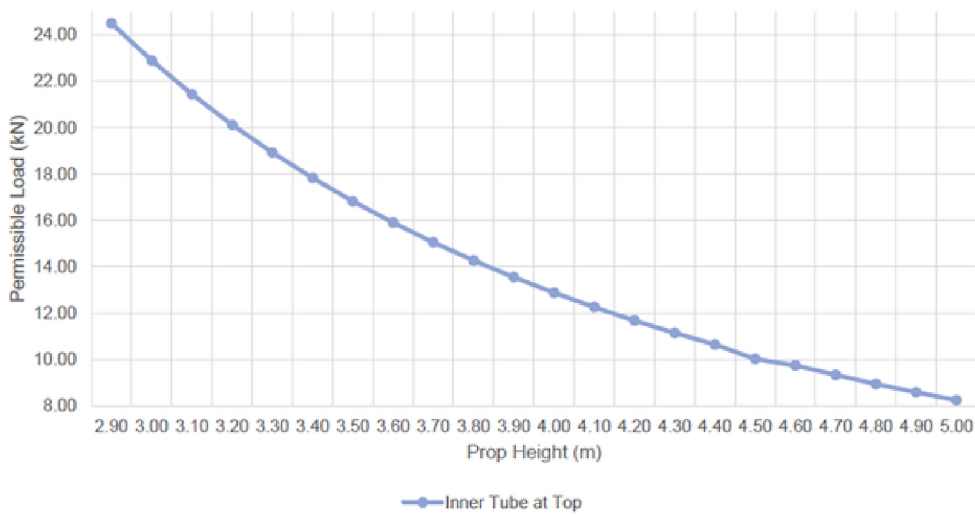

Prop Height (m)	Inner Tube At Top (kN)
2.90	24.50
3.00	22.90
3.10	21.44
3.20	20.12
3.30	18.92
3.40	17.83
3.50	16.82
3.60	15.90
3.70	15.05
3.80	14.27
3.90	13.55
4.00	12.88
4.10	12.26
4.20	11.68
4.30	11.14
4.40	10.64
4.50	10.02
4.60	9.74
4.70	9.33
4.80	8.94
4.90	8.58
5.00	8.24

FDP 20 KN D EURO PROPS

BS EN 1065

Product Description	Heading
Prop Heights	300 350 400 500 cm
Max leg load	30.90 kN
Adjustment Range	1.70m (300) up to 5.00m (500)
Weight	300: 14.5kg 350: 16.4kg 400: 19.0kg 500: 24.1kg
Corrosion Protection	Fully galvanized
Setting and adjusting	Quick setting via pegging holes Fine tuning
Stripping	Via quick release collar

Advantages



Quick release collar enables faster striking with added safety.



Pegging holes allow for quick setting of extension and are compatible with any system.



Head adapters of various types can be secured into the prop using the spring pin.